



F60/505 - IMC Vulture 726 Free-standing Food Waste Disposer - 3 Phase [5 wire][air break] - W 400 mm - 1.1 kW

Reliable, efficient, safe and easy to operate, the compact 726 Waste Disposer allows operators to quickly and effectively remove waste, to create a safer and cleaner kitchen.

- ✓ Fast and efficient disposal of up to 400kg of food waste per hour.
- ✓ Manually reversible motor to extend operational life.
- ✓ Handles up to 850 covers per sitting - ideal for medium-size kitchens.
- ✓ With class A airbreak kit - recommended when connecting to a mains water supply.
- ✓ For medium waste (plate waste, vegetables and peelings, meat and fish scraps).
- ✓ Suitable for medium kitchens with three-phase, five-wire power supply.
- ✓ Compact, free-standing design, for quick and easy loading.

Specifications

Summary

| | |
|-----------------------------|-----------------------------------|
| Brand | IMC |
| Range | Vulture |
| Series | 700 Series |
| Power Type | Electric |
| Unit Type | Free-standing |
| Available in UK Only | No |
| UK Warranty | 2 Years Parts and Labour Warranty |
| Export Warranty | Contact your local dealer |
| Mounting | Free-standing |
| GTIN | 5056105199298 |

Power and Performance

| | |
|-----------------------|------|
| Total Power kW | 1.1 |
| HP | 1.5 |
| IP Rating | IP55 |

Key Specifications

| | |
|------------------------|------------|
| Operator Safety | Interlocks |
| Airbreak | Yes |

Capacity

| | |
|-----------------------------|--------------|
| Type of Waste | Medium waste |
| Covers Per Sitting | 850 |
| Capacity Kg per Hour | 400 |

Weights and Dimensions

| | |
|----------------------------------|------|
| Unit Height (External) mm | 969 |
| Unit Width (External) mm | 400 |
| Unit Depth (External) mm | 600 |
| Net Weight Kg | 46.5 |

Supply Connections

| | |
|---------------------------------------|--|
| Requires Installation | Yes |
| Requires Electrical Supply | Yes |
| UK 3 Pin Plug | No |
| Requires Hardwiring | Yes |
| Electrical Supply Rating Watts | 1100 |
| Three Phase Amps | 2.8 |
| Three Phase Voltage | 400 |
| Water Supplied From | Mains or storage cistern |
| Water Connection Pressure Bar | 0.4 |
| Drain Connection | 40mm Pipe with P or S trap; MIN fall = 1/7 |
| Water Connection | 15mm |

Shipping

| | |
|-------------------------|-------|
| Packed Weight Kg | 51.15 |
| Packed Height cm | 104 |
| Packed Width cm | 63 |
| Packed Depth cm | 48 |

Available Options

SIDE PANEL

E60/010 726 SIDE PANEL




MAG CUTLERY SAVER

VS167 700/800/904/904X MAGNETIC CUTLERY SAVER

WATER FLOW CONTROL

VS352 726 WATER FLOW CONTROL

Technical Picture

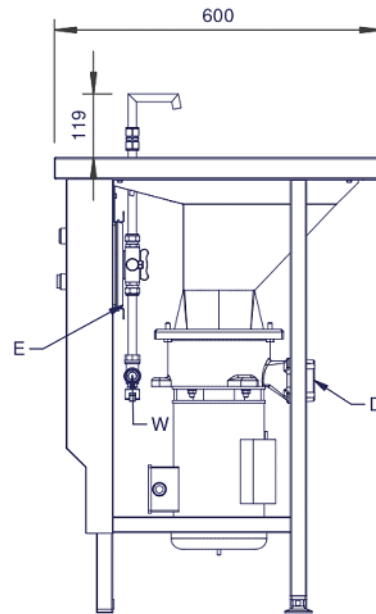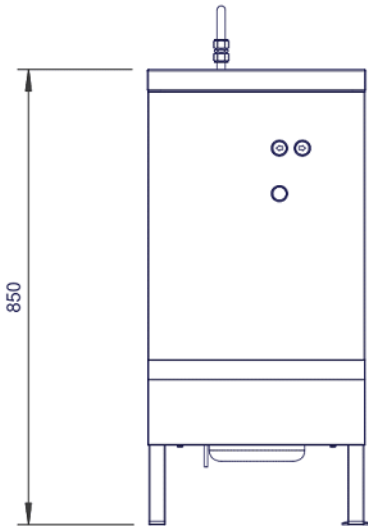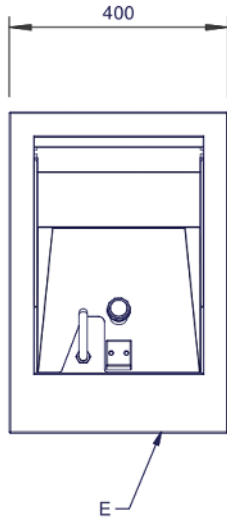

Lincat Limited

Whisby Road,
Lincoln, LN6 3QZ,
United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500
Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536
Email: export@lincat.co.uk

Opening Hours

Monday – Friday:
8.30am – 5pm