





OG8115/OP/P - Lincat
Opus 800 Propane Gas
Free-standing Single
Tank Fryer with Pumped
Filtration - 2 Baskets - W
400 mm - 22.0 kW

The Vortech High Efficiency Opus 800
Free Standing Fryer not only fries
delicious food consistently, but will also
save you both money & energy at the
same time.

- 97% energy efficiency rating verified in independent BSI tests delivers substantially lower running costs and higher output
- Two stage filtration extends oil life by up to 75% and so reducing oil costs
- Oil can be filtered during or after service even whilst hot
- Convenient electronic ignition
- Externally fired heating gives easy access for cleaning tanks

| Summary                   |                                   | Power and Performance                               |  |
|---------------------------|-----------------------------------|---|--|
| Brand                     | Lincat                            | BTU per Hour  | 75,064                                 |
| Range                     | Opus 800                          | Total Power kW                                      | 22.0                                   |
| Power Type                | Gas                               | Temperature Range °C                                | 90-190                                 |
| Gas Type                  | Propane Gas                       | IP Rating   | IP24                                   |
| Jnit Type                 | Free-standing                     | Temperature Control                                 | Electronic                             |
| Available in UK Only      | No                                |   |  |
| UK Warranty               | 2 Years Parts and Labour Warranty |   |  |
| Export Warranty           | Contact your local dealer         |   |  |
| GTIN                      | 5056105103202                     |   |  |
| Key Specifications        |                                   | Capacity  |  |
| Number of Baskets         | 2                                 | Product Output per Hour                             | 40kg chips - 12mm [frozen], 51kg chips |
| Number of Tanks           | 1                                 | r roduct Output per rioui                           | 12mm [chi                              |
| Gravity Filtration        | No                                | Capacity Litres                                     | 16.0                                   |
| Pumped Filtration         | Yes                               |   |  |
| Drain Location            | Through the body                  |   |  |
| Weights and Dimensions    |                                   | Supply Connections                                  |  |
| Unit Height (External) mm | 1070                              | Requires Installation                               | Yes                                    |
| Unit Width (External) mm  | 400                               | Requires Electrical Supply                          | Yes                                    |
| Unit Depth (External) mm  | 800                               | UK 3 Pin Plug                                       | Yes                                    |
| Net Weight Kg             | 99.2                              | Requires Hardwiring                                 | No                                     |
|                           |                                   | Electrical Supply Rating Watts                      | 100                                    |
|                           |                                   | Single Phase Amps                                   | 4.9                                    |
|                           |                                   | Single Phase Voltage                                | 230                                    |
|                           |                                   | Gas Connection BSP                                  | 1/2"                                   |
|                           |                                   | Gas Consumption at full rate<br>Propane m³ per Hour | 1.57                                   |
|                           |                                   | Gas Pressure Propane mbar                           | 37.0                                   |
|                           |                                   |   |  |

Total heat input at full rate Propane

Total heat input at full rate Propane

BTU per hour

22.0

75,064





## Shipping

 Packed Weight Kg
 109.12

 Packed Height cm
 122

 Packed Width cm
 70


 Packed Depth cm
 85


## **Available Accessories**


FP07 F8 CARBON FILTER PAD LK02 OPUS 350 LEG KIT

OA8961 SPLASHGUARD VORTECH - OPUS 800

## **Technical Picture**

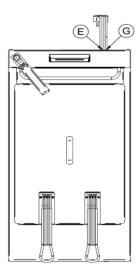

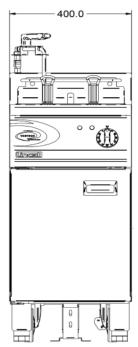

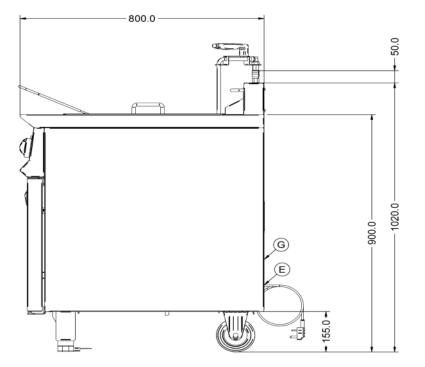







**Lincat Limited** 

Whisby Road,

Lincoln, LN6 3QZ,

United Kingdom

**Company No:** 2175448

company No. 2000

A member company of

**Customer Care** 

**Tel:** +44 1522 875500

Email: care@lincat.co.uk

**Export Customers** 

**Tel:** +44 1522 875536

Email: export@lincat.co.uk

**Opening Hours** 

Monday - Friday:

8.30am - 5pm

Product Code: 0G8115/0P/P Page Number: 3 Print Date: 05/10/2023