



P10SP6PT - Lincat Panther SuperPass Series Free-standing Hot Cupboard - Bain Marie Top - W 2400 mm - 16.52 kW

Offering unrivalled versatility, the Panther Super Pass Hot Cupboard is built for high demanding environments, with multiple hot holding and cooking functions in one mobile unit.

- ✔ For high output, demanding environments this incredibly versatile pass offers multiple hot holding and cooking functions in one mobile unit. The pass includes a Carter Hoffmann Crisp 'N Hold for holding chips and breaded products such as chicken nuggets, 2 x 1/1GN bain marie for hot holding sauces, soups, gravy and precooked foods and 2 x water tanks, suitable for boiling vegetables, pasta etc.
- ✔ Three tier heated gantries
- ✔ Pass through hot cupboard
- ✔ Fully 1/1GN compatible hot cupboard accommodating 6 1/1 gastronorms
- ✔ Thermostatically controlled bain marie
- ✔ Accurate digital electronic control of water tanks
- ✔ Individual drain tap for each water tank at the rear
- ✔ Castors as standard

Specifications

| Summary | | Power and Performance | |
|-----------------------------|-----------------------------------|----------------------------|-------------------------------------|
| Brand | Lincat | Total Power kW | 16.52 |
| Range | Panther | IP Rating | IP24 |
| Series | SuperPass | Temperature Control | Top: Mechanical; Bottom: Electronic |
| Power Type | Electric | | |
| Unit Type | Free-standing | | |
| Available in UK Only | No | | |
| UK Warranty | 2 Years Parts and Labour Warranty | | |
| Export Warranty | Contact your local dealer | | |
| GTIN | 5056105109853 | | |

| Key Specifications | | Capacity | |
|-----------------------------------|--------------|----------------------------|-----------|
| Drain Location | Rear-mounted | Gastronorm Capacity | 6 x GN1/1 |
| Number of Shelves included | 1 | Plate Capacity | 556 |
| Number of Shelf Positions | 1 | | |
| Pot Type | Gastronorm | | |
| Type of Heat | Wet/Dry | | |
| Heated Base | Yes | | |
| Heated Gantry | Yes | | |
| Static or Mobile | Mobile | | |

Weights and Dimensions **Supply Connections**

| | |
|----------------------------------|-------|
| Unit Height (External) mm | 1908 |
| Unit Width (External) mm | 2273 |
| Unit Depth (External) mm | 1000 |
| Height (Internal) mm | 405 |
| Width (Internal) mm | 2,000 |
| Depth (Internal) mm | 825 |
| Shelf Dimensions Width mm | 1,938 |
| Shelf Dimensions Depth mm | 690 |
| Net Weight Kg | 250 |

| | |
|---------------------------------------|---------------------------|
| Requires Installation | Yes |
| Requires Electrical Supply | Yes |
| UK 3 Pin Plug | No |
| Requires Hardwiring | Yes |
| Electrical Supply Rating Watts | 16,520 |
| Three Phase Amps | L1=23.9; L2=23.9; L3=23.9 |
| Three Phase Voltage | 400 |




Shipping

| | |
|-------------------------|-----|
| Packed Weight Kg | 275 |
| Packed Height cm | 200 |
| Packed Width cm | 250 |
| Packed Depth cm | 110 |

Available Accessories

| | |
|--------------|---|
| PLK/S | PLK/S - LEG KIT [FOR CONVERSION IN THE FIELD] |
|--------------|---|

Technical Picture

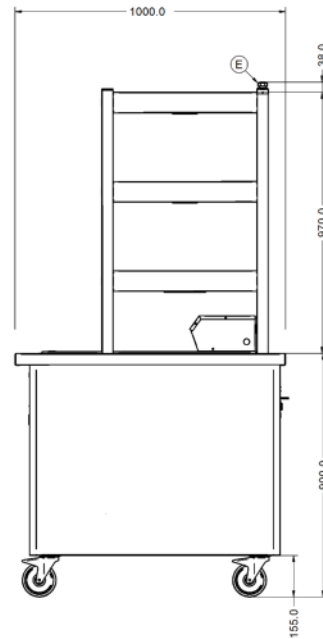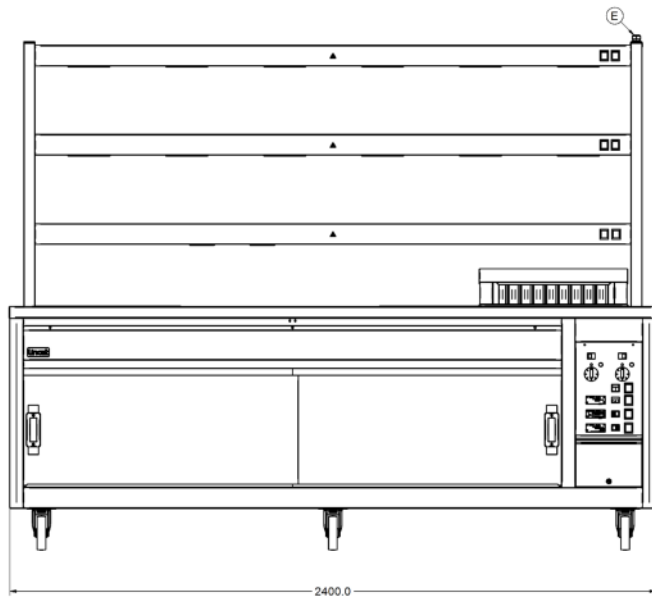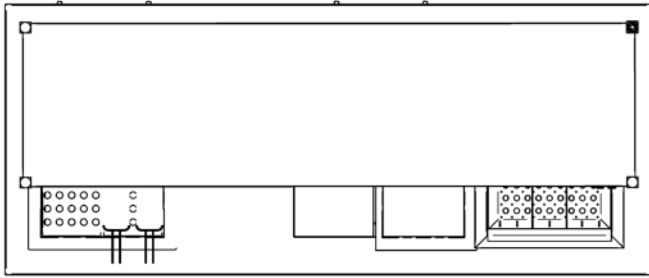

Lincat Limited

Whisby Road,
Lincoln, LN6 3QZ,
United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500
Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536
Email: export@lincat.co.uk

Opening Hours

Monday – Friday:
8.30am – 5pm