

# JADE BISCUIT TOP TECHNICAL DATASHEET

## JBTC2 TWO DOOR JADE BISCUIT TOP

## JBTC3 THREE DOOR JADE BISCUIT TOP



### JBTC2

Dimensions (mm)	External	Internal
Width	1400	870
Depth	700	585
Height	827	600
Door Opening		390
<b>Capacity</b>		
Capacity cu.ft/ltrs		13.2/374

### JBTC3

Dimensions (mm)	External	Internal
Width	1880	1350
Depth	700	585
Height	827	600
Door Opening		390
<b>Capacity</b>		
Capacity cu.ft/ltrs		19.2/545

## KEY FEATURES

- Gastronorm counter with no worktop accommodating 1/1 GN shelves or containers
- Foodsafe stainless steel exterior and aluminium interior
- Easy to clean dished base with radiused corners
- Self closing doors
- Barrel locked doors
- Magnetic balloon door gaskets with 100% tight seal
- Fitted with 2 of 1/1GN nylon coated wire shelves per section as standard or trayslides to accommodate 1/1GN containers
- Anti-tilt trayslides
- Removable racking system
- Precision injected, high density polyurethane insulation with low GWP (Global Warming Potential) and zero ODP (Ozone Depletion Potential).
- Heavy duty, non-marking swivel castors with brakes
- Removable refrigeration system designed for easy service and maintenance
- CoolSmart controller
- Designed and engineered to operate efficiently up to a 43°C ambient
- Fully automatic air cooled condensing unit
- Defrost water is vaporised using recycled heat from compressor
- High performance helium leak testing
- Connection to third party supervisory communication systems such as BMS is possible using proprietary equipment. Please contact Williams for more information.

## OPTIONS

- Stainless steel interior
- Additional shelving / trayslides
- Drawer banks (2 or 3) refer to page 3 for configurations available
- Adjustable legs in lieu of castors (add 40mm)



# JADE BISCUIT TOP TECHNICAL DATA

	HJBTC2	MJBTC2	LJBTC2	HJBTC3	LJBTC3
Temperature (°C)	+1/+4°C	-2/+2°C	-18/-22°C	+1/+4°C	-18/-22°C
Climate Class	Class 5 (40°C)	Class 4 (30°C)	Class 4 (30°C)	Class 5 (40°C)	Class 4 (30°C)
Power Supply	230V/50Hz/1Ph				
Fuse (Amps)	13	13	13	13	13
Defrost	Automatic Off Cycle	Automatic Electric	Automatic Hot Gas	Automatic Off Cycle	Automatic Hot Gas
Noise level (dBA)	63	59	61	63	61

## Fittings

Shelves	4	4	4	6	6
Trayslides per door	4	4	4	4	4

## Electrical / Energy Data - Standard Refrigerant

	R290	R290	R290	R290	R290
Refrigerant	R290	R290	R290	R290	R290
Energy Efficiency Class	A	A	D	A	D
Energy Consumption (kW / 24hrs)*	1.43	1.47	5.63	1.69	7.23
Start Up (Amps)	6.6	6.6	14.2	6.6	14.2
Running (Amps)	1.01	1.01	2.58	1.01	2.58
Heat Rejection (Watts)**	692	692	623	692	623

## IMPORTANT NOTES:

\*Energy consumption is tested to EN16825 in 24hrs


\*\*Evaporating at -10°C in 32°C Ambient

All refrigeration equipment requires adequate ventilation for efficient and effective performance


Williams is committed to a policy of continual product development and innovation. As such, we reserve the right to change product specifications stated without prior notice.

# COUNTER DRAWER CONFIGURATIONS


**JBTC2-U12**

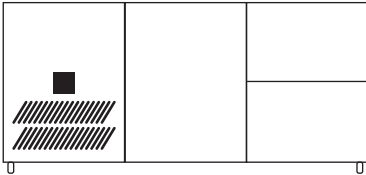


**JBTC2-U22**

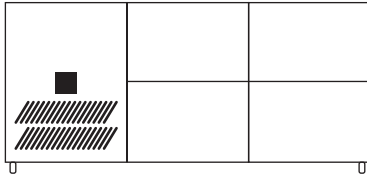


**JBTC2-U13**

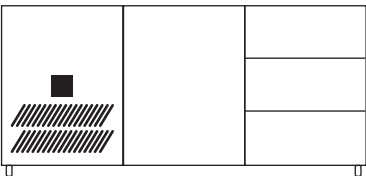


**JBTC2-U23**

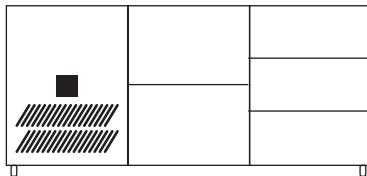


**JBTC2-U33**

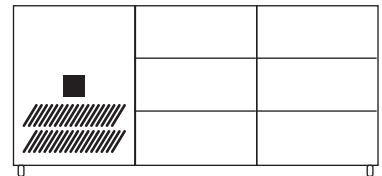


**JBTC3-U112**

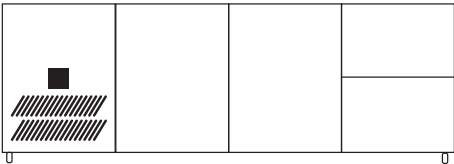


**JBTC3-U122**

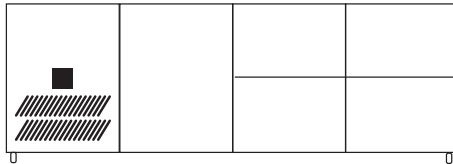


**JBTC3-U222**

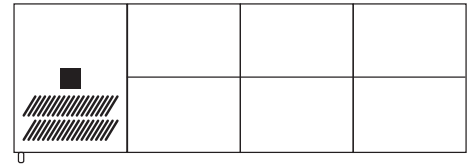


**JBTC3-U113**

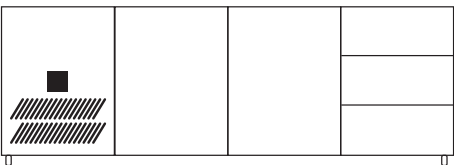


**JBTC3-U133**

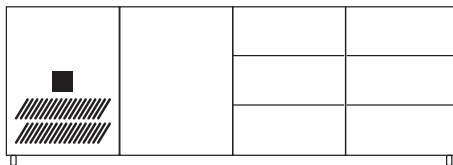


**JBTC3-U333**

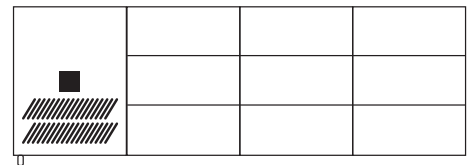

**JBTC3-U123**

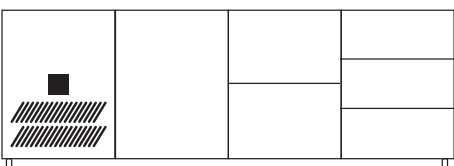

**JBTC3-U233**

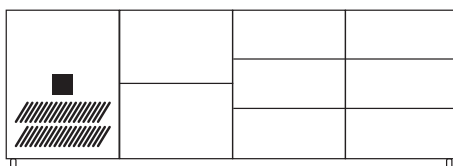

**JBTC3-U223**



Williams Refrigeration  
Bryggen Road,  
North Lynn Industrial Estate  
King's Lynn, Norfolk. PE30 2HZ

T +44(0) 1553 817 000  
Spares: +44(0) 1553 817 017  
E [info@williams-refrigeration.co.uk](mailto:info@williams-refrigeration.co.uk)  
W [www.williams-refrigeration.co.uk](http://www.williams-refrigeration.co.uk)

