

MODEL S30/S30A

SOFT SERVE FREEZER

TWIN TWIST, FREE STANDING, DIGITAL CONTROL



Ideal for **medium capacity outlets** to add soft serve ice cream and frozen yogurt. Innovative design keeps operation simple and helps reduce cost of ownership.



FAST FREEZE DOWN

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption



DIGITAL CONTROL AND DISPLAY

Microprocessor control provides access to system settings and additional functions. Digital interface displays critical info as system status, temperatures, dispense count, errors and so on.



LOW MIX INDICATOR

Light turns "ON" at low mix to alert operator to add mix



SELF CLOSING DISPENSING VALVE

Automatically prevents product overflow after dispense



DISPENSE SPEED CONTROL

Provides flexibility in dispense rate control for different applications



STANDBY

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight



SAFETY PROTECTIONS



- Low temperature and motor overload shut-off to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating
- Thermal overload to protect from motor overheating

INDUSTRY LEADING SOFT SERVE EQUIPMENT DESIGNED TO THE HIGHEST SPEC FOR QUALITY AND EASE OF USE

MAXIMISE YOUR PROFITS

MODEL S30/S30A

SOFT SERVE FREEZER MACHINE

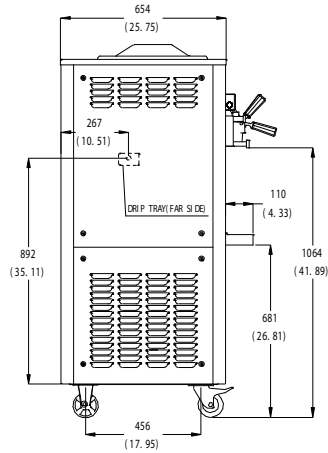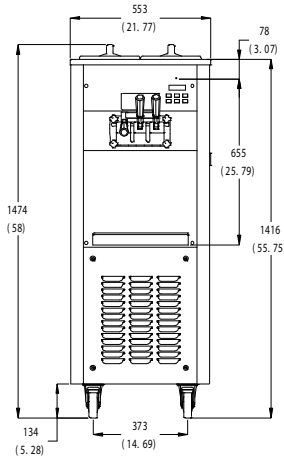

ISO 9001 REGISTERED

SPECIFICATIONS

Flavours	2 + Twist	
Freezing Cylinders	2 x 1.7L / 1.8qt	
Mix Hoppers	2 x 12L / 12.7qt	
Output Capacity (80 grams)	300 serves/hr	
Clearance Requirements	152mm/6" on back	

WEIGHT	KG/LB (Gravity)	KG/LB (Pump)
Net	165 / 367	175 / 389
Shipping	180 / 400	190 / 422
Volume	0.90 CBM / 3 1.78 CBF	

DIMENSIONS	NET (MM/IN)	SHIPPING (MM/IN)
Width	552 / 21.7	660 / 26.0
Depth	652 / 25.7	830 / 32.7
Height	1474 / 58.0	1640 / 64.6

ELECTRICAL	AMPS	VOLTS	POWER(KW)
220-240/50/1	16 Amp - Single Phase	NA	NA
208-230/60/1	16 Amp - Single Phase	NA	NA

FEATURES

CONTROL SYSTEMS S	SINGLE, DIGITAL
REFRIGERATED HOPPERS	<input checked="" type="checkbox"/>
HOPPER AGITATOR OPTIONAL	<input checked="" type="checkbox"/>
TEMPERATURE DISPLAY	<input checked="" type="checkbox"/>
STANDBY MODE	<input checked="" type="checkbox"/>
AUTO CLOSING DISPENSING VALVES	<input checked="" type="checkbox"/>
DISPENSING SPEED CONTROL	<input checked="" type="checkbox"/>
LOW MIX INDICATOR LIGHT	<input checked="" type="checkbox"/>
LOW MIX INDICATOR ALARM	<input checked="" type="checkbox"/>
LOW TEMPERATURE PROTECTION	<input checked="" type="checkbox"/>
MOTOR AMPERAGE PROTECTION	<input checked="" type="checkbox"/>
HIGH PRESSURE PROTECTION	<input checked="" type="checkbox"/>
THERMAL OVERLOAD PROTECTION	<input checked="" type="checkbox"/>
S30A: PUMP FEED MODEL, AVAILABLE	<input checked="" type="checkbox"/>
AIR PUMP OPTION, AVAILABLE	<input checked="" type="checkbox"/>
INVERTER SYSTEM	<input checked="" type="checkbox"/>