



DOMINA PRO 700 - FRYERS

FRG74A2V

2 BOWLS, GAS ON CLOSED STAND



TECHNICAL DATA:

External dimensions - WxDxH (cm)	40x73x118
Tank capacity (lt-GN)	7+7
Total power (kW)	6,25+6,25=12,5
IPX5	●


ADDITIONAL TECHNICAL DATA:

Tank dimensions - WxDxH (cm)	14x34x30
Weight (kg)	62
Volume (m3)	0,6

The 18/10 AISI 304 stainless steel tanks are continuous-welded with rounded corners for easy cleaning and sanitation. The used oil outlet system is simple and safe with an oil collection tank with stainless steel filter. All models have safety thermostat and thermostatic temperature control to keep the oil temperature within safety parameters.

Gas versions: models available with direct heating via heating elements in the tank or with indirect heating via a burner outside the V-shaped tank, which guarantees excellent cleaning.

Electric versions: with liftable heating elements to guarantee perfect cleaning of the tank, versions with digital display are also available (FRBE74AD - FRBE77AD - FRBE74AHP) equipped with automatic melting, they allow precise control of the oil temperature, the setting of the cooking time and the setting of automatic programs to set and speed up the most frequent cooking. The HP model also ensures maximum responsiveness essential for obtaining high productivity in small spaces.

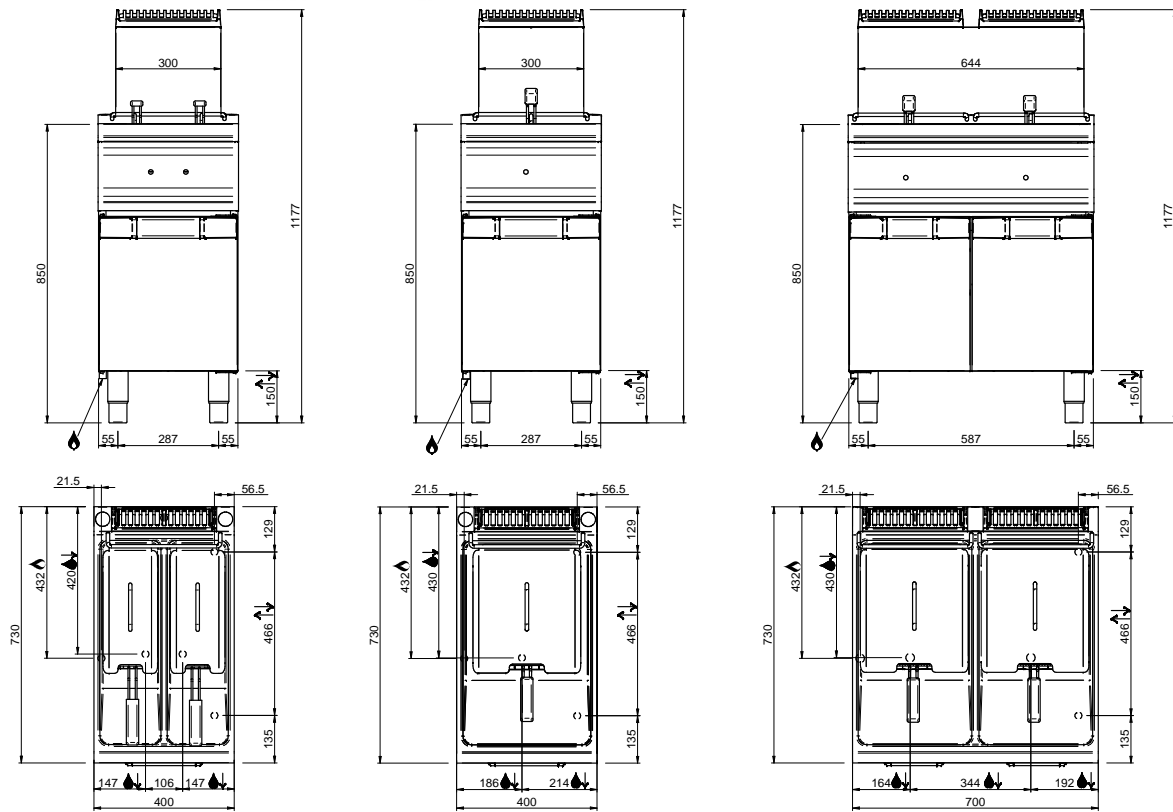

LEGENDA SIMBOLI / LEGEND



INGRESSO GAS / GAS INLET
(EN 10226-1) Ø M 1/2"



ALIMENTAZIONE ELETTRICA /
POWER SUPPLY



INGRESSO ACQUA /
WATER INLET Ø M 1/2"



SCARICO ACQUA / OLII
WATER / OILS DRAIN



ATTACCO EQUIPOTENZIALE /
EQUIPOTENTIAL



REGOLAZIONE PIEDINI /
FEET ADJUSTMENT (h 0/+50)
/ TOP VERSION (h 0/+5)